

Ultratherm Pet Cassette

Description:

Ultratherm pet cassettes have been specifically designed for heating kennels and catteries.

Available in 2 standard sizes/power dissipations the panels can be either ceiling or wall mounted to provide gentle radiant warmth.

Heaters are manufactured using zinc coated steel with a durable wipe clean white powder coated painted front panel.

A red LED indicator is fitted to the front panel to indicate when the panel is powered.



Typical Installation


The panels are heated using flexible flat sheet carbon film radiant heating elements insulated in high temperature mica. With no moving parts Ultratherm Pet Cassettes provide a reliable long life heat source for all kennels and catteries.

All heaters are fitted with a thermal cutout to limit the surface temperature. It is recommended heaters are controlled using an air sensing thermostat to provide optimum temperature control.

Pet cassettes are Class I appliances and must be connected to earth and protected by a 30mA RCD.



PC1

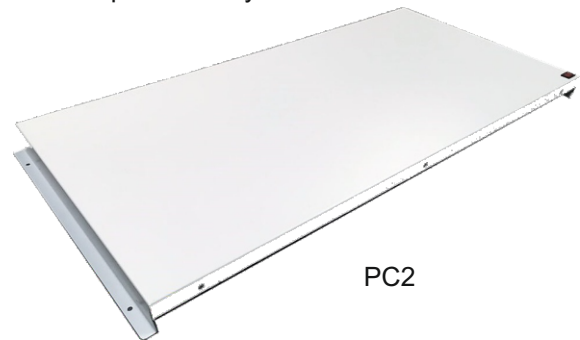

PC2

Technical Specification:

| Model | Power(W) | Voltage(V) | Length(mm) | Height(mm) | Depth(mm) |
|-------|----------|------------|------------|------------|-----------|
| PC1 | 110 | 230 | 410 | 380 | 40 |
| PC2 | 225 | 230 | 790 | 380 | 40 |

Note: dimensions include mounting flange.

Heating element: carbon flexible film insulated with mica sheet

Thermal insulation: 32kg/m³ fibreglass

Supply cable: 2m of 3 core 0.75mm²

Thermal cut-out: 75C

Warranty: 12 months from date of purchase

IP rating: IPx4

Cleaning: Panels should be isolated from the supply and wiped clean with a damp cloth

Flexel International Ltd.
Telford Road
Glenrothes
KY7 4NX

T: 01592 757313